


NewGate LARGE FLOW ASME Coalescing, Particulate & High Temperature Filters

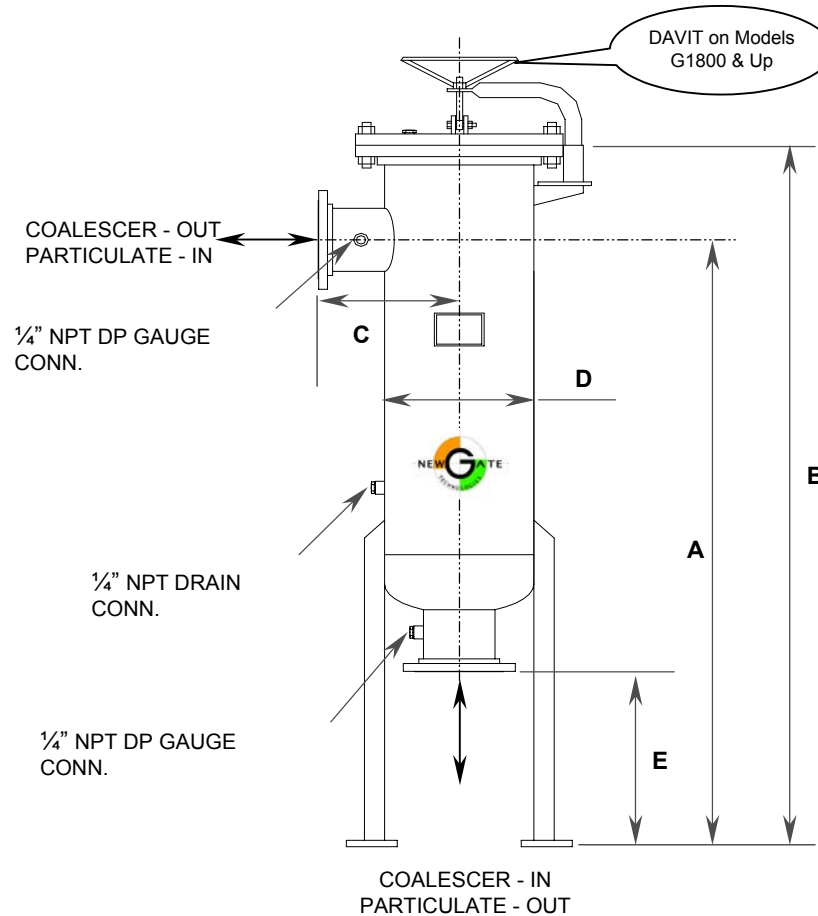

Model	Capacity * Scfm	IN/OUT Inches FLG	Dimensions, Inches					Ship Wt. lbs (Est)
			A	B	C	D	E	
G900-X	2000	4	56.5	65.0	11.0	10.8	20.0	525
G1400-X	3000	6	73.0	83.0	11.0	10.8	20.0	630
G1800-X	4000	6	74.8	85.0	13.0	12.8	20.0	775
G2300-X	5000	8	77.0	88.0	13.0	12.8	20.0	850
G2700-X	6000	8	77.5	89.5	15.0	14.0	20.0	900
G4400-X	10000	8	83.0	96.0	17.0	18.0	24.0	1,295

* At Inlet Air conditions of 100 Psig and 100°F.

Maximum Operating conditions are 150 Psig and 140°F.



NEWGATE TECHNOLOGIES, INC

1137 SW 7TH ROAD • OCALA, FLORIDA 34474

TEL: (352) 351-9992 • FAX: (352) 351-9979

www.newgatetechnologies.com